

LUKAS

LWIR 640 x 512 15 μ m

Description

LUKAS Pro is a T2SL LWIR detector which shows an excellent performance especially for ground vehicles with its anti-blooming capability and strong penetration in foggy & dusty area. This LWIR detector ensures the visibility even in tough environmental conditions such as sun-glint and light reflex.

Applications



Security /
Surveillance




Night
Observation



Thermal
Sight



Images from the 2D IR detector

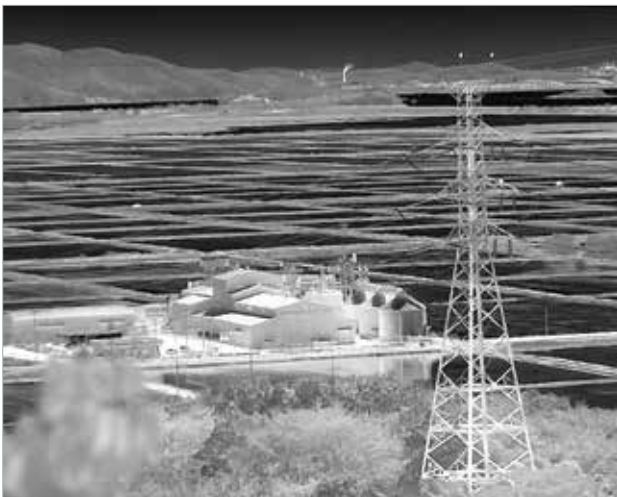

SEE THE NEW WORLD THROUGH i3system, Inc.

Specifications

Array format	640 x 512
Pixel pitch	15 μ m
Detector type	T2SL
Wavelength band	LWIR (7.7 μ m ~ 9.4 μ m)
No. of output channel	4 channels
Operability	$\geq 99.5\%$
NETD	$\leq 25\text{mK}$ @ Half-well fill, 60Hz
Frame rate	up to 180Hz @ 640 x 512 Full Frame
Dimension	72mm x 56mm x 142mm
Cool-down time	$\leq 7\text{min}$
Environmental condition	MIL-STD-810
Operating temperature	-40~+71 $^{\circ}$ C
FPA operating temperature	80K

Dimension

